


### Planar MOS-Controlled Diode Wafer (PMCD)

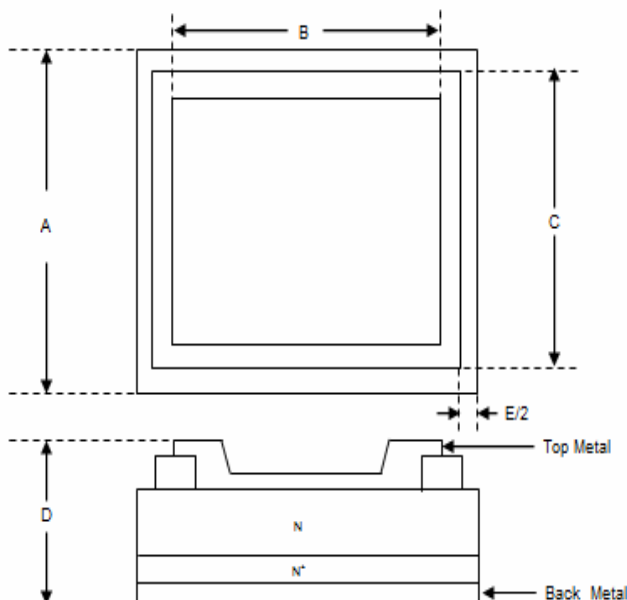

Item	Dimensions	
	um	mil
Die Size (A)	2805	110
Top Metal Pad Size (B)	2600	102.4
Passivation Seal (C)	2735	107.7
Wafer Thickness (D)	260	10.2
Scribe Line Width (E)	70	2.76
Other Informations		
Wafer Size	6"	
Gross Die	2000	
Top Metal	Ag	
Back Metal	Ag	

### Electrical Characteristics @TA=25°C

Item	Symbol	Spec. Limit	Die Sort	Unit
Maximum Repetitive Peak Reverse Voltage @0.05mA	$V_{RRM}$	300	315	V
Maximum Average Forward Rectified Current	$I_O$	15	-	A
Forward Voltage Drop, @ $I_F=3A$ @ $I_F=10A$ @ $I_F=15A$	$V_F$	- 0.88 0.92	0.77 - -	V
Maximum Reverse Current at Rated $V_{RRM}$	$I_R$	1	0.5	$\mu A$
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	280	-	A
Operating Temperature Range	$T_J$	-50 to +175	-	°C
Storage Temperature Range	$T_{STG}$	-50 to +175	-	°C